



HMG-838EPI6Z1



Introduction

Overview

Ethernet Direct社は、ユーティリティグレードのパイオニアとして、変電所で見られる過酷な環境でも確実且つ安全に操作できるよう特別に設計されたフルマネージドギガビットイーサネットスイッチを提供します。

HMG-838EPI6Z1は、IEC-61850-3およびIEEE 1613認証、8ポートの10 / 100Base-T (X) と3-SFPポートのGigabit/Fast Ethernetを搭載した産業用イーサネットマネージドスイッチです。電力変電所システムの要求を満たすため、EMIおよびサージ電流に対する耐久性に優れています。このパワフルで実用的なスイッチは、ハードウェア製品の信頼性を最大限に高めるため、アメリカ製CPUプラットフォームを使用しており、動作温度 -40~85°Cをサポートします。変電所システムを守るため、冗長化且つ絶縁型電源(24/48 VDC)を用いて設計されています。さらに強化されたソフトウェア機能には、STP/RSTP/MSTP/ITU-T G.8032 ERPSや冗長ケーブル用のマルチダイレクトリング、IEEE 1588 PTP V2、レイヤ2イーサネットIGMP、VLAN、サービス品質、ACL、セキュリティ、IPv6、帯域制御、ポートミラーリング、ケーブル診断、Energy Efficient Ethernet(省電力型イーサネット)などがあります。

Ethernet Direct社のスマートグリッドテクノロジー製品は“ゼロパケットロス”を保証し、GOOSEマルチキャストをサポートします。HMG-838EPI6Z1は、流通オートメーション、変電所オートメーション、再生可能発電、火力発電、送電網の相互接続、AMI (Advanced Metering Infrastructure) などの分野に適しています。

Features

High Performance Network Switching Technology

- Complies with IEEE standards
- Provides 8 x 10/100Base-T(X) with RJ-45 connector with supporting of Green Ethernet IEEE802.3az EEE (Energy Efficient Ethernet)
- Provides 3 x 100/1000Base SFP slots with supporting of DDMI
- Supports various network redundant solutions, including Direct-Ring, Direct-Chain, Join-Ring, STP, RSTP, MSTP and ITU-T G.8032
- Proprietary ultra high speed redundant technology with < 10ms recovery time @ 250 devices
- Supports IEEE1588 PTP V2 for precise time synchronization, to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- Supports various network security solutions, Port and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Supports DHCP Server/Client/Relay/Snooping/Snooping option 82/Relay option 82
- Network traffic priority, QoS, Traffic classification QoS, CoS, bandwidth control for Ingress/Egress, broadcast storm control, DiffServ
- Supports GOOSE Message
- Supports IEEE802.1Q VLAN, MAC-based VLAN, IP Subnet-based VLAN, Protocol-based VLAN, VLAN translation, GVRP/MVRP

- Supports IGMP/MLD snooping V1/V2/V3, IGMP Filtering/Throttling, IGMP query, IGMP proxy reporting, MLD snooping
- Supports dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- Supports RMON, MIB II, Port mirroring, Syslog, IEEE802.1ab LLDP for network monitoring
- Supports IPv6 Telnet server, ICMPv6
- Supports CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Supports firmware upgrade via TFTP & HTTP with redundant firmware option

Reliable Power Design

- Supports 24 to 48VDC or -48VDC redundant power input
- Power reverse polarity protection and overload current protection

Robust Industrial Design

- IEC 61850-3 & IEEE 1613 certified for Power Substation
- EN 61000-6-2 and EN 61000-6-4 certified to use in heavy industrial environment
- EN 50121-4 certified for Railway Applications (Track Side)
- Robust industrial design case complies with IP30 housing standard
- Supports operating temperature -40 to 85°C
- DIN-Rail or optional wall mounting installation

Specifications

Hardware Specifications

Interface

Total Ports: 11 ports
RJ-45 Ports: 8 x 10/100Base-T(X) auto-negotiation speed, Full/Half duplex, auto MDI/MDI-X
Console Port: RS-232 (RJ-45 interface)
Fiber Ports: 3 x 100/1000Base SFP slots
LEDs: System: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Yellow)
Fiber Ports: Link/Active (Green)
RJ-45 Ports: 10/100 Link/Active (Green)
Alarm Contact: 1A@24VDC
CPU Watchdog: Supported

Power Requirements

Power Input: 24 to 48VDC or -48VDC, redundant dual inputs
Power Consumption: 24VDC/8W, 48VDC/9.2W
Power Protection: Reverse polarity protection, overload current protection

Physical

Dimensions: IP30 standard, 82mm (W) x 152mm (H) x 106mm (D)
Installation: DIN-Rail or optional wall mounting

Environmental

Operating Temperature: -40 to 85°C

Storage Temperature: -40 to 85°C

Operating Humidity: 5% to 95% RH (Non-condensing)

Technical Standard:

IEEE 802.3 10Base-T Ethernet
 IEEE 802.3u 100Base-TX/100Base-FX
 IEEE 802.3z Gigabit Fiber
 IEEE 802.3x Flow Control
 IEEE 802.3ad Port trunk with LACP
 IEEE 802.3ac VLAN Tagging extension (Max. frame size extended to 1522 Bytes)
 IEEE 802.3az EEE (Energy Efficient Ethernet)
 IEEE 802.1D Spanning Tree
 IEEE 802.1w Rapid Spanning Tree
 IEEE 802.s Multiple Spanning Tree
 IEEE 802.1p Class of Service
 IEEE 802.1Q VLAN Tagging
 IEEE 802.1X User Authentication (Radius)
 IEEE 802.1AB LLDP
 ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection Switching)

Protocol Technology: CSMA/CD

Switching Architecture: Store and Forward

Regulatory Approvals

EMC: CE, EN 61000-6-2, EN 61000-6-4
EMI: FCC Part 15 Subpart B Class A, CE EN55022 Class A
EMS: EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-8
Safety: UL 60950-1
 Power Substation: IEC 61850-3 IEEE 1613 (Certified)

Railway Application (Track Side): EN 50121-4 (Certified)
Vibration: IEC 60068-2-6
Free Fall: IEC 60068-2-32
Environmental: WEEE, RoHS
MTBF: 535,335 hours based on Mil-Hdbk-217F, GB
Warranty: 5 years

Software Specifications

Redundancy:

Direct-Ring, Direct-Chain, Join-Ring < 10ms recovery time,
 (Each switch can configure up to 5 rings regardless of Direct-Ring, Direct-Chain, Join-Ring,
 and each ring can contents 250 units of switches), supports loop protection
 STP/RSTP/MSTP
 ITU-T G.8032 / Y.1344 ERPS with < 50ms recovery time
 (Single Ring, Sub-Ring, Multiple ring topology networks)
 Link Aggregation: Static supports up to 5 trunk groups
 Dynamic (IEEE 802.3ad LACP) supports up to 5 trunk groups

VLAN:

VID 1 to 4094
 VLAN group up to 4094 groups
 IEEE 802.1ad Q-in-Q
 MAC-based VLAN (256 entries)
 IP Subnet-based VLAN (128 entries)
 Protocol-based VLAN (Ethernet, SNAP, LLC), (128 entries)
 VLAN Translation (256 entries)
 GVRP (GARP VLAN Registration Protocol)
 MVR (Multicast VLAN Registration)

QoS:

Supports GOOSE Message, follow IEC 61850 standard to achieve zero packet loss
 Port based and IEEE 802.1p based CoS
 QoS determined by port, per port 8 active priorities queues
 IP Precedence based Co, IP DSCP based CoS
 DiffServ (RFC 2474) Remarking

Bandwidth Control:

Ingress/Egress

Storm Control:

Unicast, Broadcast, Multicast


IGMP/MLD Snooping:

IGMP Snooping v1/v2/v3, MLD Snooping v1/v2
 Port Filtering Profile
 Throttling, Fast Leave
 Maximum Multicast Group: Up to 1022 entries
 Query / Static Router Port

Security:

IEEE 802.1X (Port-based, MAC-based), RADIUS, TACACS+ 3.0
 Supports ACL, no. of rules up to 256 entries

>> Dimensions (unit=mm) >>>>

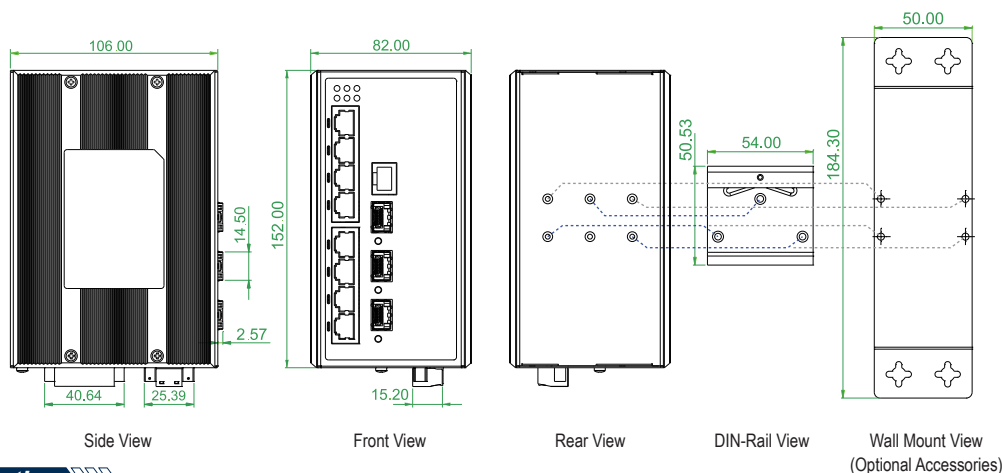

>> Ordering Information >>>>

HMG-838EPI6Z1

IEC 61850 Industrial 8 x 10/100Base-T(X) + 3 x 100/1000Base SFP Gigabit Managed Ethernet Switch, -40 to 85°C, (IEEE 1588 PTP)

BASIC JAPAN

Basic Japan株式会社 Suginami Tokyo, Japan

Phone: 03-5335-7651

E-mail: mail@basicjp.com / URL: www.basicjp.com