




# WMG-821EPAT

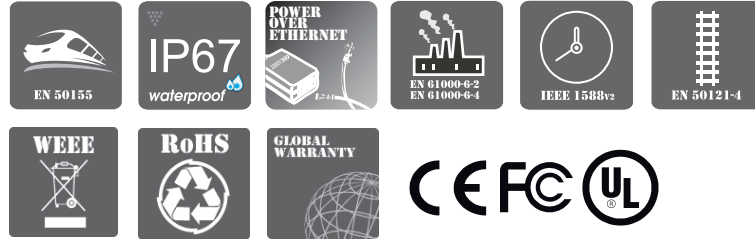

## »»»Introduction»»»

### Overview

The WMG-821EPAT is designed to meet the requirements of EN 50155, EN 50121-4, UL 60950-1 for secured transmission in Transportation Automation such as trackside & railway applications, rolling stock, vehicles and moving machine applications. The WMG-821EPAT is an Industrial 8x10/100Base-T(X) M12 UTP and 2x10/100/1000Base-T(X) M12 UTP with 8 PoE injector ports classified as Power source equipment (PSE) and supports an extended operating temperature of -40 to 80°C. It comes with IP67 ingress protection against dust, humidity, and oil and water submersion. It uses M12 connectors to ensure water tight, robust connections and to guarantee reliable connections against environmental disturbances, such as vibration and shock. For safety, it supports 24/48VDC redundant power input and built-in power booster to regulate the PoE output voltage at 55VDC to cater for the PoE/PoE+ requirement and stabilize the connected PDs. Ethernet Direct Industrial PoE products support IEEE 802.3af/802.3at standards which are able to provide up to 180 watts PoE power to the connected PoE devices.

The WMG-821EPAT supports the most advanced Ethernet functions which include STP/RSTP/MSTP/ ITU-T G.8032 ERPS and multiple Direct-Ring for redundant cabling, IGMP, VLAN, QoS, Security, IPv6, bandwidth control, port mirroring, cable diagnostic and IEEE802.3az EEE (Energy Efficient Ethernet) management to optimize the power consumption. It provides advanced PoE Management (Auto Test & Auto Reset PD, Scheduling) and remote cable diagnostic detection to reduce maintenance costs. Ethernet Direct EN 50155 switches come with auto bypass function in the event of sudden power loss, particularly in daisy chain or linear topology networks. When power failure occurs in one of the switches on a train, the bypass relay function can activate, automatically bypassing the internal circuits and maintaining link between neighboring equipment. With this function, secured data transmission from terminals to backbone and higher network availability can be 100% guaranteed. In addition, the EN 50155 certified covers power input voltage, surge, EFT, ESD, vibration and shock.

## »»»Features»»»

### High Performance Network Switching Technology

- Complies with IEEE standards
- Provides 8 x 10/100Base-T(X) with M12 connector (4-pin, female, D-Coded) and supporting of Green Ethernet IEEE802.3az EEE (Energy Efficient Ethernet) function
- Provides 2 x 10/100/1000Base-T(X) with M12 connector (8-pin, female, A-Coded) and supporting bypass function
- Supports various network redundant solutions, including Direct-Ring, Direct-Chain, Join-Ring, STP, RSTP, MSTP and ITU-T G.8032
- Proprietary ultra high speed redundant technology with < 10ms recovery time @ 250 devices
- Supports IEEE1588 PTP V2 for precise time synchronization, to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- Supports various network security solutions, Port and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Supports DHCP Server/Client/Relay/Snooping option 82/Relay option 82
- Network traffic priority, QoS, Traffic classification QoS, CoS, bandwidth control for Ingress/Egress, broadcast storm control, DiffServ
- Supports IEEE802.1Q VLAN, MAC-based VLAN, IP Subnet-based VLAN, Protocol-based VLAN, VLAN translation, GVRP/MVRP

- Supports IGMP/MLD snooping V1/V2/V3, IGMP Filtering/Throttling, IGMP query, IGMP proxy reporting, MLD snooping
- Supports dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- Supports RMON, MIB II, Port mirroring, Syslog, IEEE802.1ab LLDP for network monitoring
- Supports IPv6 Telnet server, ICMPv6
- Supports CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Supports firmware upgrade via TFTP & HTTP with redundant firmware option

### Reliable Power Design

- Supports 24/48VDC redundant power input with IP67 M23 connector
- Power reverse polarity protection and overload current protection
- Built-in high efficiency power booster to cater for the PoE/PoE+ requirement

### Robust Industrial Design

- EN 50155 certified for Railway Applications and IEC 61373 test passed for vibration and shock resistant
- EN 50121-4 certified for Railway Applications (Track Side)
- EN 61000-6-2 and EN 61000-6-4 certified to use in heavy industrial environment
- Robust industrial design case complies with IP67 housing standard
- Supports operating temperature -40 to 80°C
- Wall mount or optional DIN-Rail mounting installation

## »»»Specifications»»»

### Hardware Specifications

#### Interface

**Total Ports:** 10 ports

**M12 Ports:** 8 x 10/100Base-T(X) M12 connector (4-pin, female, D-Coded) and 2 x 10/100/1000Base-T(X) M12 connector (8-pin, female, A-Coded), auto-negotiation speed, Full/Half duplex, auto MDI/MDI-X

**PoE Ports:** 8 x M12 connector (4-pin, female, D-Coded), Supports IEEE 802.3af/IEEE 802.3at End-Span, Alternative A mode

**Console Port:** RS-232, M12 connector (5-pin, male, A-Coded)

**LEDs:** System: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Amber)

M12 Ports: 10/100 Link/Active (Green), 1000 Link/Active (Amber)

M12 Ports (PoE): Output Power On (Green), Fault (Green flash 1 time per second), Output Power Off (Green Off)

**Alarm Contact:** 1A@24VDC, M12 connector (5-pin, male, A-Coded)

**CPU Watchdog:** Supported

### Power Requirements

**Power Input:** 24/48VDC (20 to 57VDC), M23 (5-pin, male), redundant dual inputs

#### Power Consumption:

24VDC: 198.3 (Full load with PoE), 8.9W (Without PoE), Booster Efficiency 95.00%

48VDC: 198.8 (Full load with PoE), 10.1W (Without PoE), Booster Efficiency 95.30%

**PoE Power Budget:** Max. 180W for total PD consumption

Built-in high efficiency power booster to boots up and regulate the output power at 55VDC for PoE/PoE+ requirement, and to stabilize the PDs with guarantee deliver of PoE power up to 100 meters

**Power Protection:** Reverse polarity protection, overload current protection

### Physical

**Dimensions:** IP67 standard, 240mm (W) x 168mm (H) x 70mm (D)

**Installation:** Wall mount or optional DIN-Rail mounting

### Environmental

**Operating Temperature:** -40 to 80°C

**Storage Temperature:** -40 to 85°C

**Operating Humidity:** 5% to 95% RH (Non-condensing)

### Technical

#### Standard:

IEEE 802.3 10Base-T Ethernet

IEEE 802.3u 100Base-TX/100Base-FX

IEEE 802.3ab 1000Base-T

IEEE 802.3af PoE

IEEE 802.3at PoE+

IEEE 802.3x Flow Control

IEEE 802.3ad Port trunk with LACP

IEEE 802.3ac VLAN Tagging extension (Max. frame size extended to 1522 Bytes)

IEEE 802.3az EEE (Energy Efficient Ethernet)

IEEE 802.1D Spanning Tree

# Industrial 10-ports EN 50155 IP67 M12 Gigabit Managed PoE/PoE+ Ethernet Switch

IEEE 802.1w Rapid Spanning Tree  
IEEE 802.s Multiple Spanning Tree  
IEEE 802.1p Class of Service  
IEEE 802.1Q VLAN Tagging  
IEEE 802.1X User Authentication (Radius)  
IEEE 802.1AB LLDP  
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection Switching)  
**Protocol Technology:** CSMA/CD  
**Switching Architecture:** Store and Forward

## Regulatory Approvals

**EMI:** FCC Part 15 Subpart B Class A, CE EN55022 Class A

## Software Specifications

### Redundancy:

Direct-Ring, Direct-Chain, Join-Ring < 10ms recovery time,  
(Each switch can configure up to 5 rings regardless of Direct-Ring, Direct-Chain, Join-Ring,  
and each ring can contents 250 units of switches), supports loop protection  
STP/RSTP/MSTP  
ITU-T G.8032 / Y.1344 ERPS with < 50ms recovery time  
(Single Ring, Sub-Ring, Multiple ring topology networks)  
Link Aggregation: Static supports up to 5 trunk groups  
Dynamic (IEEE 802.3ad LACP) supports up to 5 trunk groups

### VLAN:

VID 1 to 4094  
VLAN group up to 4094 groups  
IEEE 802.1ad Q-in-Q  
MAC-based VLAN (256 entries)  
IP Subnet-based VLAN (128 entries)  
Protocol-based VLAN (Ethernet, SNAP, LLC), (128 entries)  
VLAN Translation (256 entries)  
GVRP (GARP VLAN Registration Protocol)  
MVR (Multicast VLAN Registration)

### QoS:

Port based and IEEE 802.1p based CoS  
QoS determined by port, per port 8 active priorities queues  
IP Precedence based Co, IP DSCP based CoS  
DiffServ (RFC 2474) Remarking

### Bandwidth Control:

Ingress/Egress

### Storm Control:

Unicast, Broadcast, Multicast

### IGMP/MLD Snooping:

IGMP Snooping v1/v2/v3, MLD Snooping v1/v2  
Port Filtering Profile  
Throttling, Fast Leave  
Maximum Multicast Group: Up to 1022 entries  
Query / Static Router Port

### Security:

IEEE 802.1X (Port-based, MAC-based), RADIUS, TACACS+ 3.0  
Supports ACL, no. of rules up to 256 entries  
HTTP/HTTPS, SSL, SSH v2  
Local Authentication  
Remote Access Security: RADIUS, TACACS+  
Management interface access filtering via Web, Telnet/SSH, CLI console

**EMC:** CE, EN 61000-6-2, EN 61000-6-4

**EMS:** EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6,  
EN 61000-4-8,

**Safety:** UL 60950-1

**Railway Application:** EN 50155 (Certified)

**Railway Application (Track Side):** EN 50121-4 (Certified)

**Shock:** IEC 61373

**Vibration:** IEC 61373

**Free Fall:** IEC 60068-2-32

**Environmental:** WEEE, RoHS

**MTBF:** 362,429 hours based on Mil-Hdbk-217F, GB

**Warranty:** 5 years

### Management:

SNMP, Web, Telnet/SSH, CLI management  
TFTP/HTTP backup/restore configurations  
Firmware upgrade via TFTP/HTTP, supports dual firmware  
RMON I (1, 2, 3, 9 group), RMON II  
RFC1213 MIB II, Private MIB  
Supports UPnP, IP Source Guard, Port Mirroring  
Warning message sends to syslog, e-mail, alarm relay  
DNS Client, Proxy  
LLDP: LLDP-MED

### System Log:

Supports local system log and remote Syslog server

### DHCP:

Server, Client, Relay, Snooping  
Snooping option 82, Relay option 82

### Time Management:

**IEEE1588 PTP V2:** Ordinary-Boundary, Peer to Peer Transparent Clock, End to End  
Transparent Clock, Master, Slave  
NTP/SNTP Client

### IPv6:

IPv6 Management Telnet Server/ICMP v6  
SNMP over IPv6, HTTP over IPv6, SSH over IPv6, IPv6 Telnet, IPv6 NTP (Client), IPv6 SNTP  
(Client), IPv6 TFTP, IPv6 QoS, IPv6 ACL (256 entries)

### Green Ethernet:

Supports IEEE802.3az EEE (Energy Efficient Ethernet): Management to optimize the power  
consumption  
Determine the cable length and lowering the power for ports work with short cable  
Lower the power for a port when there is no link  
LED Power Management: Adjustment on LEDs intensity


### Cable Diagnostic: (Copper ports only)

Shows physical status of the UTP cable, in order to get more accurate result the cable length  
suggestion is 7-140 meters

### Advance PoE Management:

PoE PD Failure Auto Checking and Auto reset when PD fails  
PoE Scheduling (On/Off schedule weekly)  
PoE Configuration, PoE Enable/Disable  
Power limit by classification, Power limit by management  
Max. PoE power budges at 180W limitation  
Power feeding priority

## Dimensions (unit=mm)

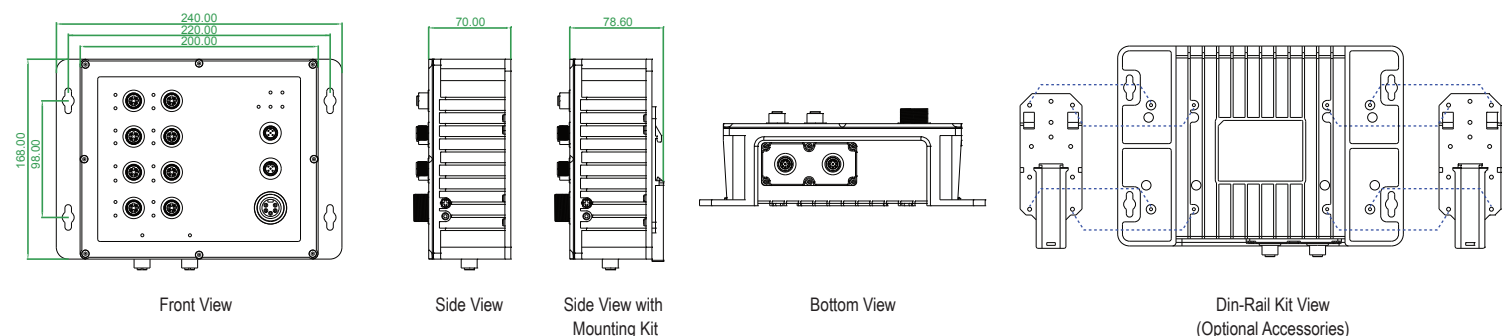




## Ordering Information

**WMG-821EPAT**

Industrial 8 x 10/100Base-T(X) + 2 x 10/100/1000Base-T(X) EN 50155 IP67 M12 Gigabit Managed PoE/PoE+ Ethernet Switch, -40 to 80°C, (IEEE 1588 PTP)





## Optional Accessories

### Cables

			
<b>WA-M12AM8-RJ-1M</b> M12 A-Code Male (8-Pin) to RJ-45 Gigabit Ethernet Cable AWG 24, IP67, 1M	<b>WA-M12DM4-RJ-1M</b> M12 D-Coded Male (4-Pin) to RJ-45 Fast Ethernet Cable AWG 24, IP67, 1M	<b>WA-M12AF5-O-1M</b> M12 A-Coded Female (5-Pin) to Open Wire Alarm Contact Cable AWG 22, IP67, 1M	<b>WA-M23F5-O-1M</b> M23 Female (5-Pin) to Open Wire Power Cable AWG 16, IP67, 1M

**\*\*Note: All cable length customisable.**

### Connectors & Others

			
<b>WA-M12AM8C</b> M12 A-Coded Male (8-Pin) Connector	<b>WA-M12DM4C</b> M12 D-Coded Male (4-Pin) Connector	<b>WA-M12AF5C</b> M12 A-Coded Female (5-Pin) Connector	<b>WA-001D</b> Din-Rail Mounting Kit

# BASIC JAPAN

Basic Japan Co., Ltd. Suginami Tokyo, Japan  
Phone: +81-3-5335-7651  
E-mail: mail@basicjp.com  
URL: www.basicjp.com